

CRAYLER MILITARY APPLICATIONS

PALFINGER CRAYLER



MOBILE SOLUTIONS FOR ANY TYPE OF TERRAIN



PALFINGER CRAYLER – different models for different applications. Designed to the ANSI standards and FOPS & ROPS tested, the forklift from the PALFINGER Company meets all the safety requirements and also offers the user best-possible operating convenience, like excellent ground clearance, which are important preconditions for military applications. The CRAYLER BM is a remote controlled forklift complying to EMC 89/336/EWG with lifting capacity options from 1500 up to 2100 kg and is available with 2 and 4 wheel drive. C130 Hercules transportation is possible. Lifting capacity options from 1500 up to 2500 kg (3000 kg for the CRAYLER CR) and lifting mast heights up to 3.7 m are characteristics of the CRAYLER F3 and CR. The centered seat position on the CRAYLER F3 and CR models protects the operator from any danger while offering perfect surround visibility.








CONVINCING TECHNOLOGY



CRAYLER BM – THE GO ANYWHERE VEHICLE FOR FIELD OPERATIONS

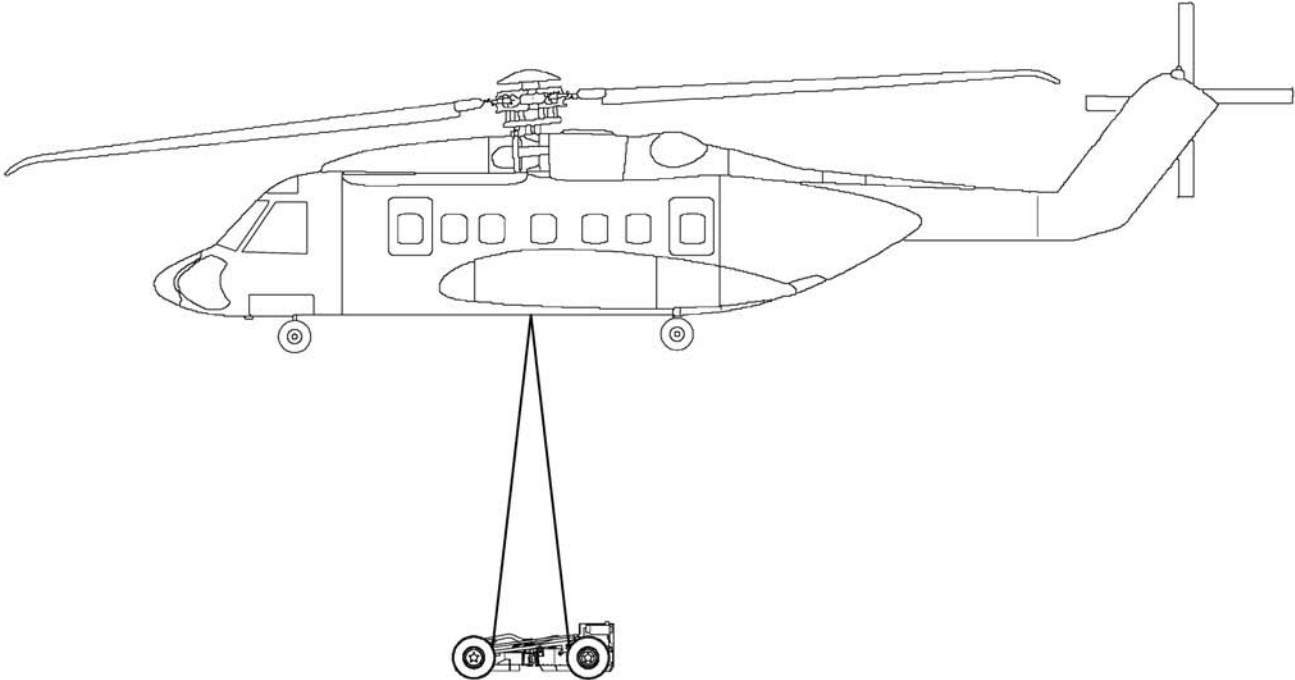

BENEFITS SPEAK FOR THEMSELVES



Open-view mast

Best possible overview on any job.




KTL cathodic paint system

Best corrosion protection through dip painting and powder coating.



Central seat

High safety and comfort through centrally positioned seat.



Operation

Ergonomically arranged controls.




Drive system

High-performance drives guarantee efficient working and a long service life.




Compact design

Low dead weight and compact design, well protected and yet easily accessible components.



Service

Easy and time-saving maintenance, worldwide service network for PALFINGER customers.



Directly flanged pumps

Reliable and sturdy technology

The pictured forklifts are partly equipped with special extras and therefore do not necessarily represent standard models. Country-specific regulations are to be observed upon attachment.

PALFINGER Europe GmbH

F.-W.-Scherer-Straße 24, A-5101 Bergheim

phone: +43 (0)662 4684 - 2182, fax: +43 (0)662 45 48 62

e-mail: info@palfinger.com



Right of technical changes reserved. Specifications without obligation.

www.palfinger.com

KP-MILCRAYLERM1+E